



Kit 1157


NISSAN Cefiro, 4-dr Sedan, 99-03

NISSAN Maxima, 4-dr Sedan, 00-03



**480R
754**



480







750



THULE[®]
SWEDEN

ISO 11154-E

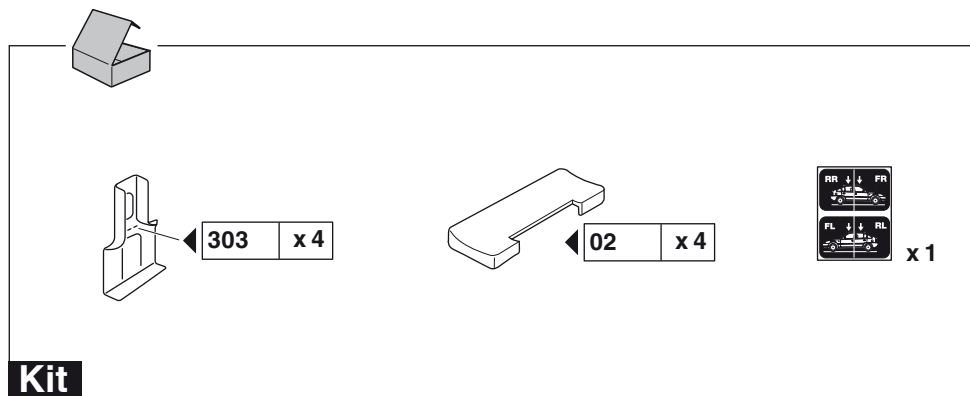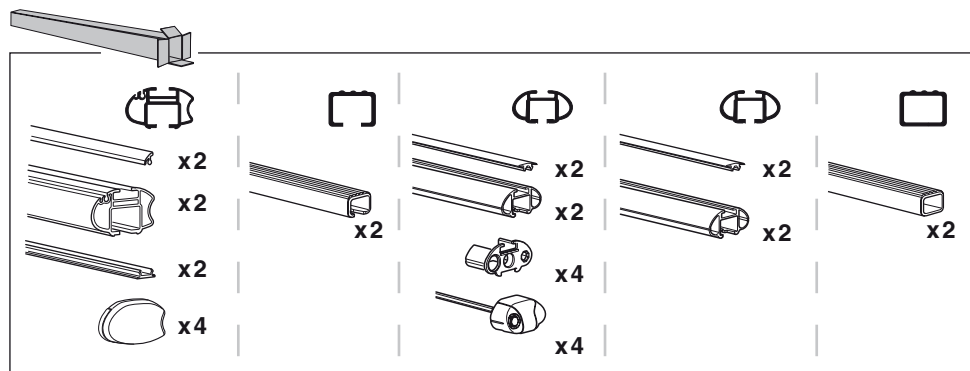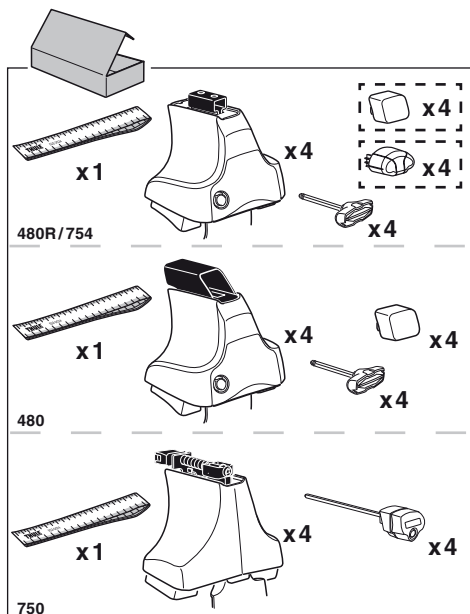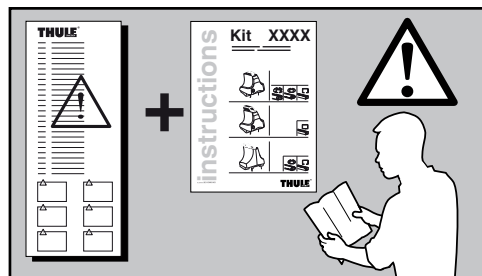

1




480R/754



480



750

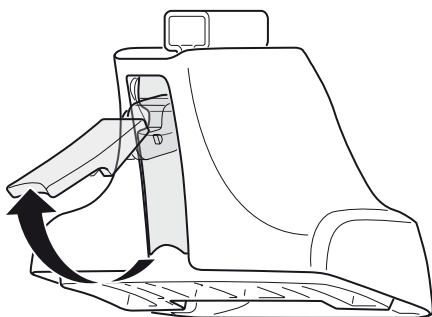

2



480R/754















480




750


+

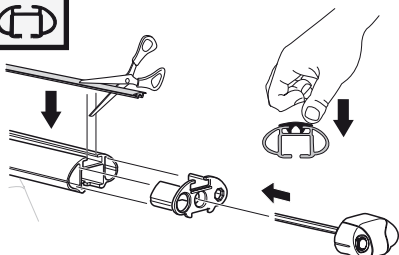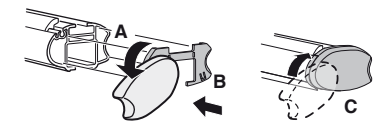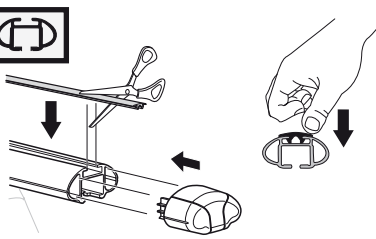

3




754




750



1



2



X


NISSAN Cefiro, 4-dr Sedan, 99-03

32,5


NISSAN Maxima, 4-dr Sedan, 00-03

32,5

1



2



Y

NISSAN Cefiro, 4-dr Sedan, 99-03

30,5

NISSAN Maxima, 4-dr Sedan, 00-03

30,5




480R



480

1



2



X inch

X mm

NISSAN Cefiro, 4-dr Sedan, 99-03

38 ³/₈ "


976 mm

NISSAN Maxima, 4-dr Sedan, 00-03

38 ³/₈ "

976 mm

1



2



Y inch

Y mm

NISSAN Cefiro, 4-dr Sedan, 99-03

37 ⁵/₈ "

956 mm













NISSAN Maxima, 4-dr Sedan, 00-03

37 ⁵/₈ "


956 mm

4



NISSAN Cefiro, 4-dr Sedan, 99-03
NISSAN Maxima, 4-dr Sedan, 00-03

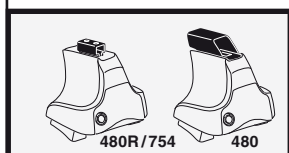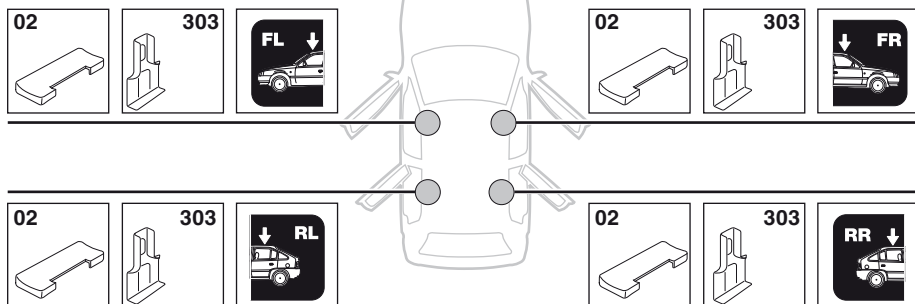

5

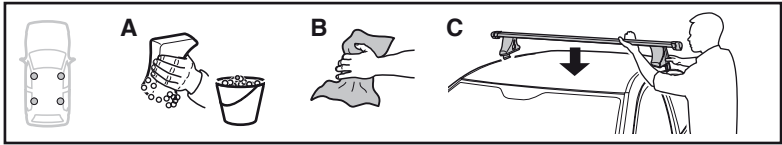

	X mm	Y mm	X inch	Y inch
NISSAN Cefiro, 4-dr Sedan, 99-03	230 mm	650 mm	9"	25 ⁵ / ₈ "
NISSAN Maxima, 4-dr Sedan, 00-03	230 mm	650 mm	9"	25 ⁵ / ₈ "

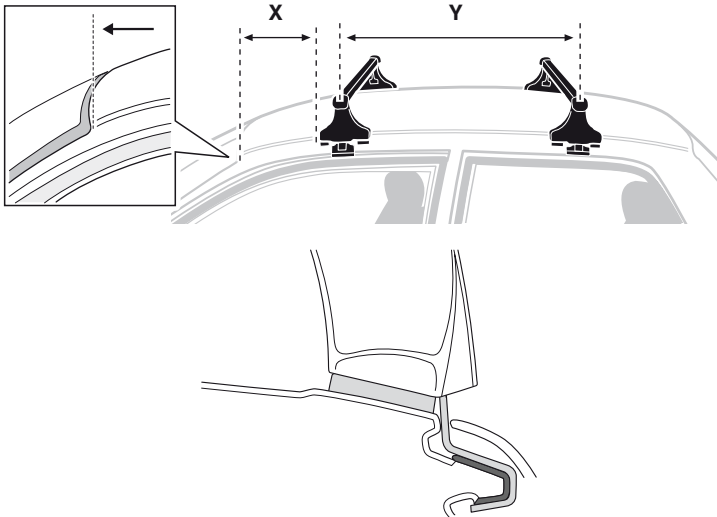

GB/US Tighten alternately

D Die Schrauben abwechselnd anziehen

F Serrer alternativement chaque côté

NL Afwisselend aan de linker- en de rechterkant aandraaien

I Alternare il serraggio delle viti

E Serrare alternativamente

PT Aperte alternadamente

S Dra åt växelvis

FIN Kierrä vuorotellen

EST Pinguldage vaheldumisi

LAT Pielvelciēt pamišus

LIT Užsukinėkite pakaitomis

PL Śruby dokręcaj naprzemiennie

RU Затягивайте попеременно

CZ Pokręťte багаžníka dokręcaj dokręcaj naprzemiennie.

SK Doťahujte striedavo

SLO Privijajte izmenično.

HR Naizmjenično zategnite

HU Egymástól függetlenül szorítandó

GR Σφίγγετε εναλλάξ

TR Dönüşümlü sıkın


中文 交替拧紧

한국어 번갈아 가며 조이십시오.

日本語 交互に締め付けてください。

ไทย ขันในแบบสลับ






6





480R/754



480

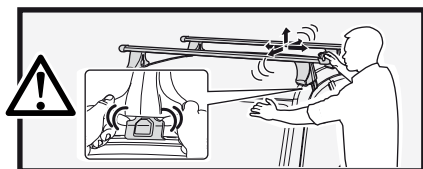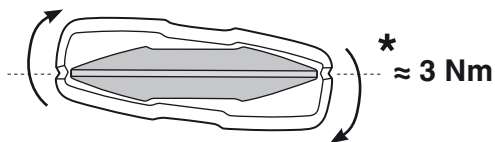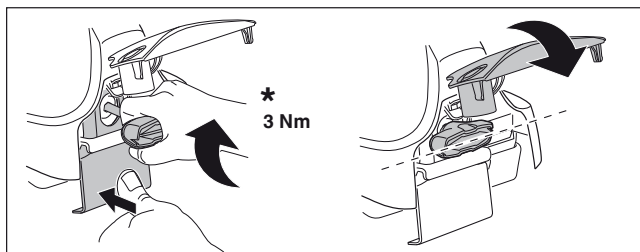

750




i




1




2




i




1




2




i








1



2



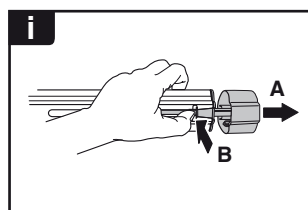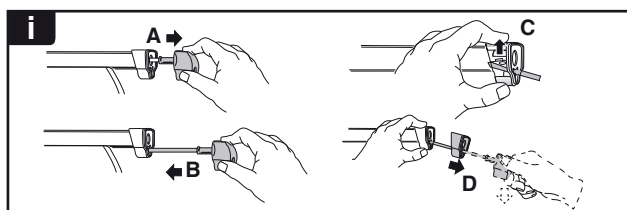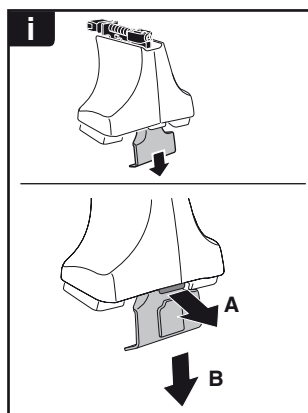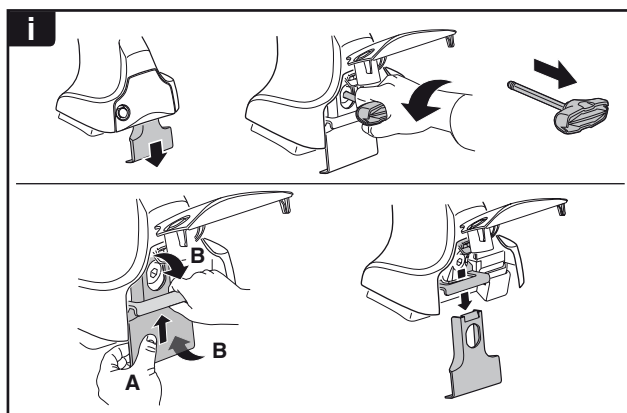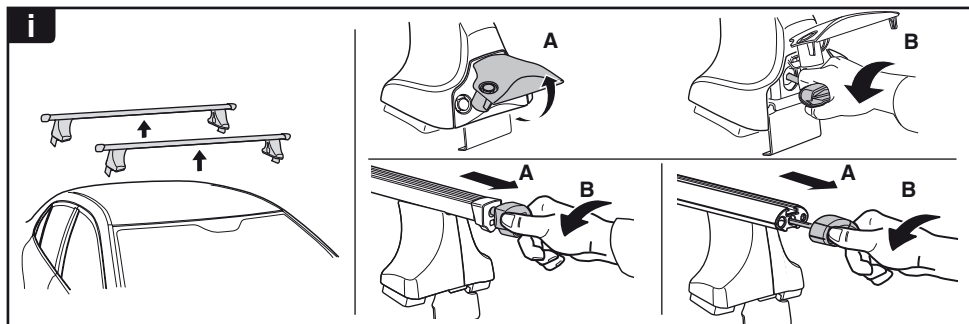

THULE®
SWEDEN

**ONE
KEY
SYSTEM**

		(x4)
		(x6)
		(x8)
NA		(x10)
EUR		(x12)
ASIA		