




Kit 1386

NISSAN Tiida Latio, 4-dr Sedan, 04– (JPN)



480R
754



480








750




THULE[®]
SWEDEN

ISO 11154-E



Kit

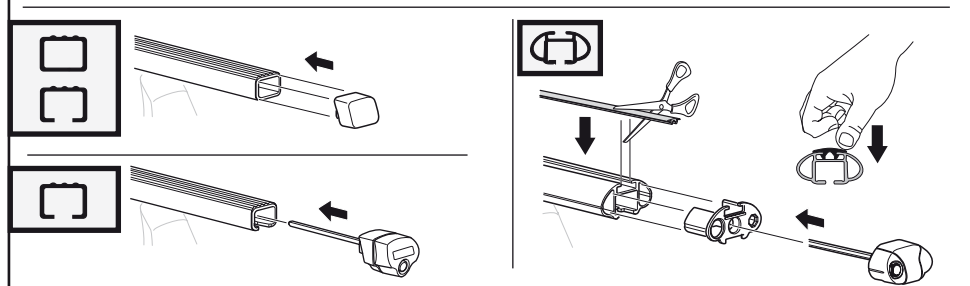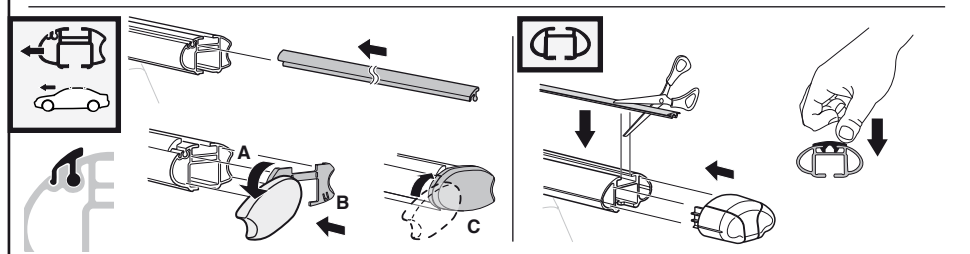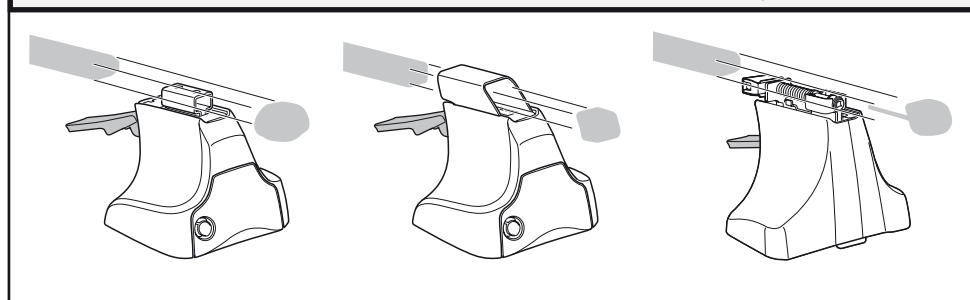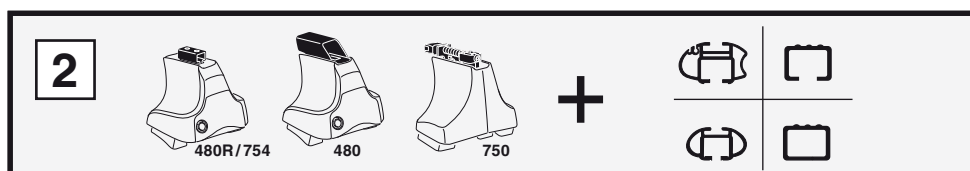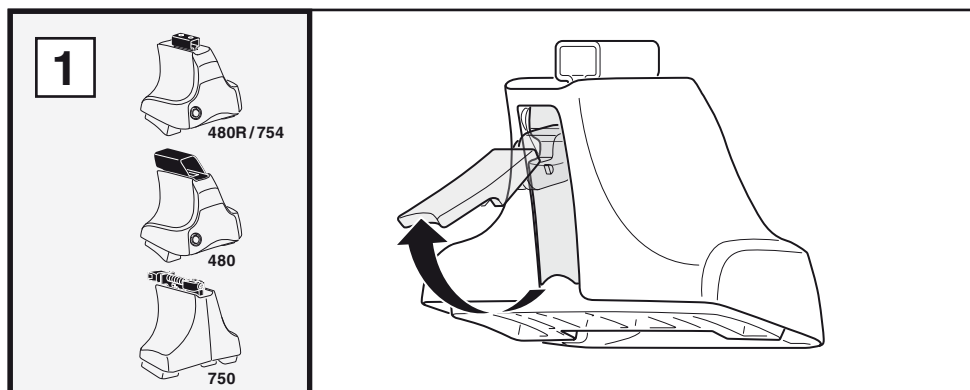

3





754



750

1



2





NISSAN Tiida Latio, 4-dr Sedan, 04- (JPN)

X

36

1



2



NISSAN Tiida Latio, 4-dr Sedan, 04- (JPN)

Y

35




480R




480

1



2



NISSAN Tiida Latio, 4-dr Sedan, 04- (JPN)


X inch

39 3/4"

X mm

1011 mm

1



2



NISSAN Tiida Latio, 4-dr Sedan, 04- (JPN)

Y inch














39 3/8"

Y mm


1001 mm

4



NISSAN Tiida Latio, 4-dr Sedan, 04- (JPN)

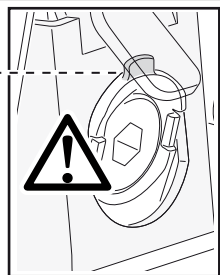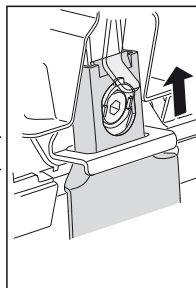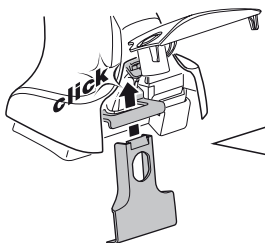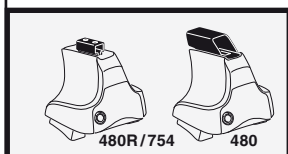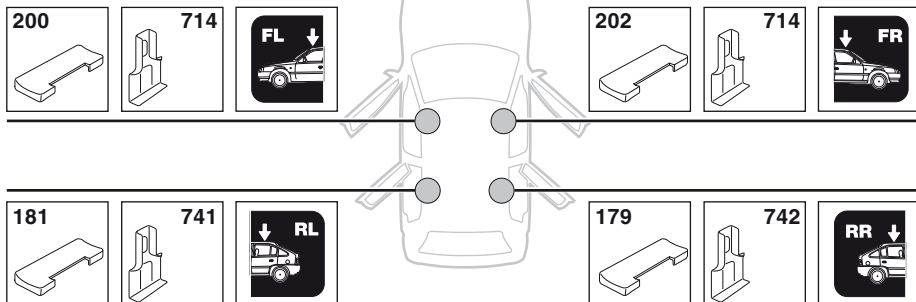

5

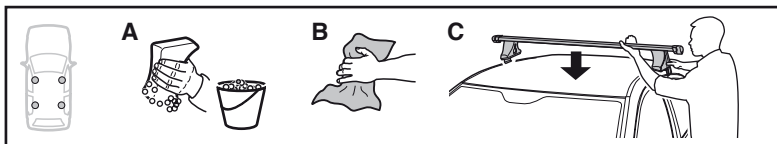

	X mm	Y mm	X inch	Y inch
NISSAN Tiida Latio, 4-dr Sedan, 04- (JPN)	465 mm	680 mm	18 1/4"	26 3/4"

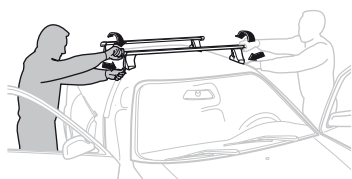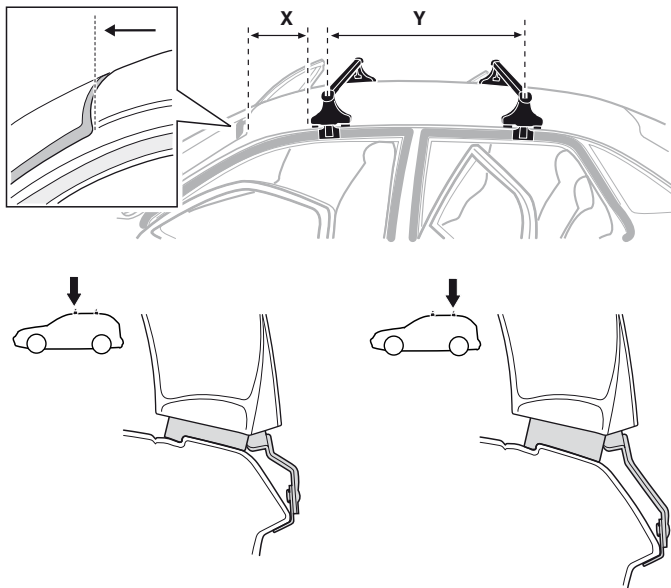

GB/US Tighten alternately

D Die Schrauben abwechselnd anziehen

F Serrer alternativement chaque côté

NL Afwisselend aan de linker- en de rechterkant aandraaien

I Alternare il serraggio delle viti

E Apertar alternativamente

PT Aperte alternadamente

S Dra åt växelvis

FIN Kierrä vuorotellen

EST Pinguldage vaheldumisi

LAT Pievelciet pamišus

LIT Užsukinėkite pakaitomis

PL Śruby dokręcaj naprzemiennie

RU Затягивайте попеременно

CZ Pokręťte багаžníka dokręcaj dokręcaj naprzemiennie.

SK Doťahujte striedavo

SLO Privijajte izmenično.

HR Naizmjenično zategnite

HU Egymástól függetlenül szorítandó

GR Σφιγγετε εναλλάξ

TR Dönüşümlü sıkın


中文 交替拧紧

한국어 번갈아 가며 조이십시오.

日本語 交互に締め付けてください。

ไทย ชันในแบบสลับ





6





480R/754



480

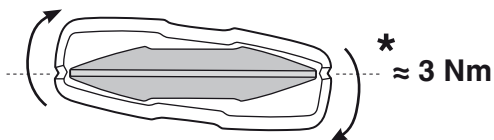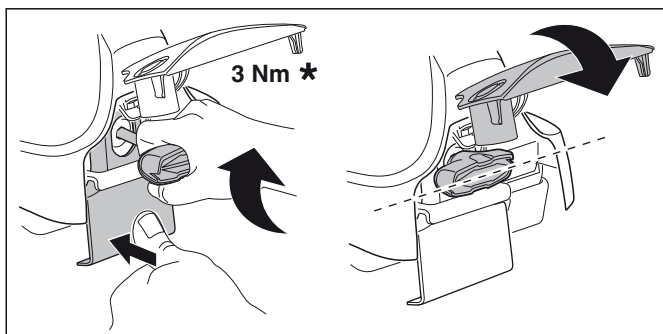


750




i




1




2




i




1




2




i








1



2



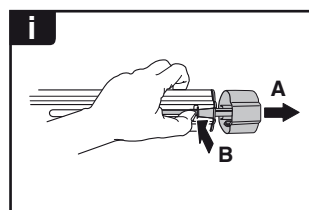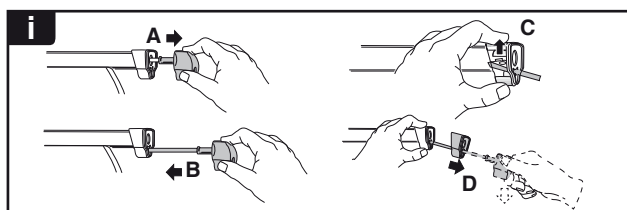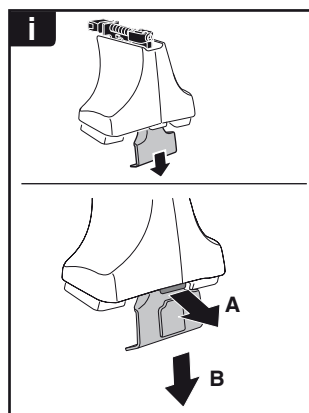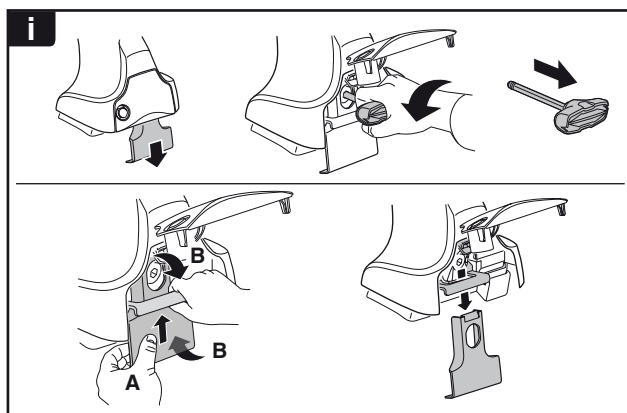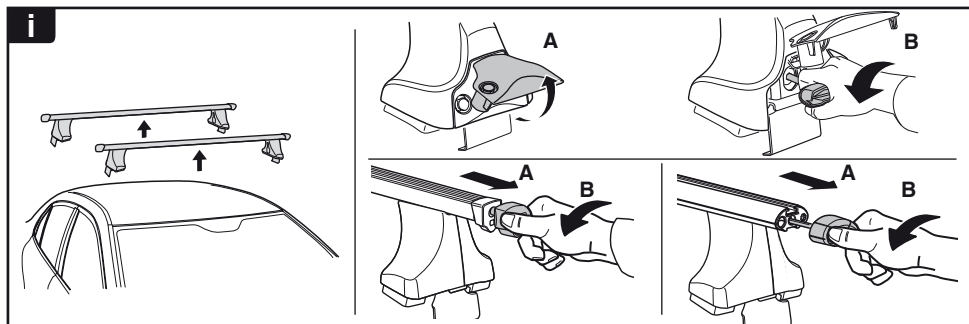

THULE®
SWEDEN

**ONE
KEY
SYSTEM**

544 (x4)

596 (x6)

588 (x8)

NA 510 (x10)

EUR 452 (x12)

ASIA