




Kit 1488

HYUNDAI Genesis, 4-dr Sedan, 08–



480R
754



480



750



THULE[®]
SWEDEN

ISO 11154-E

xx kg

xx lbs

+

7 kg

15,4 lbs

=

Max.

40 kg

Max.

88 lbs

80 km/h

50 Mph

130 km/h

80 Mph

40 km/h

25 Mph

0

km/h

Mph

+

instructions

Kit XXXX

THULE

x1

x4

x4

x4

480R/754

x1

x4

x4

480

x1

x4

x4

750

x2

x2

x2

x4

x2

x2

x2

x4

146

x2

995

x1

996

x1

73

x2

294

x1

295

x1

RR

FR

FL






RL

x1




Kit

2



503-1488

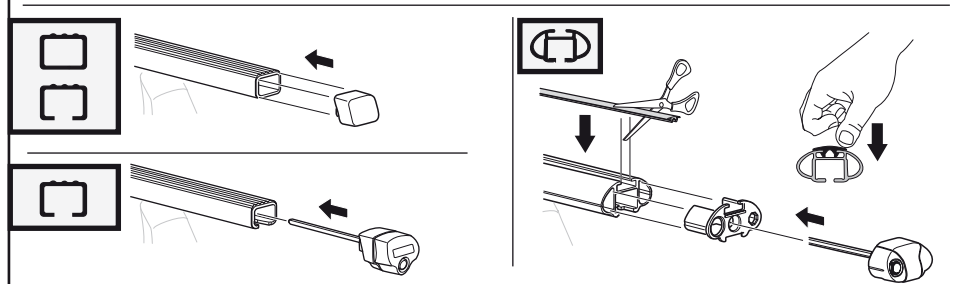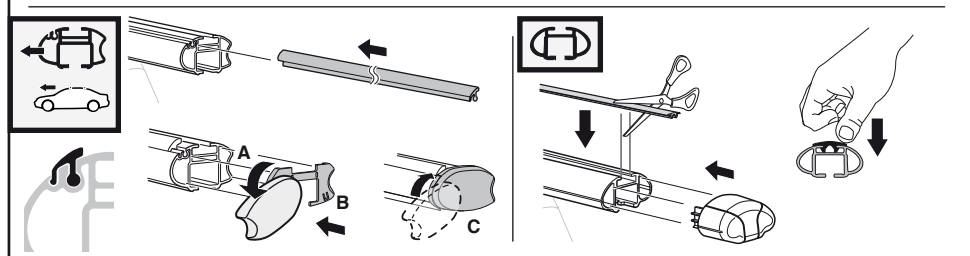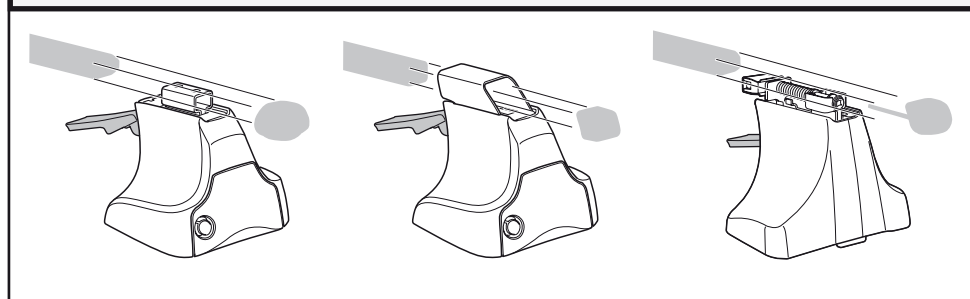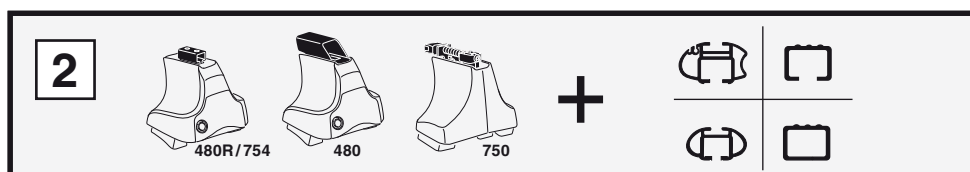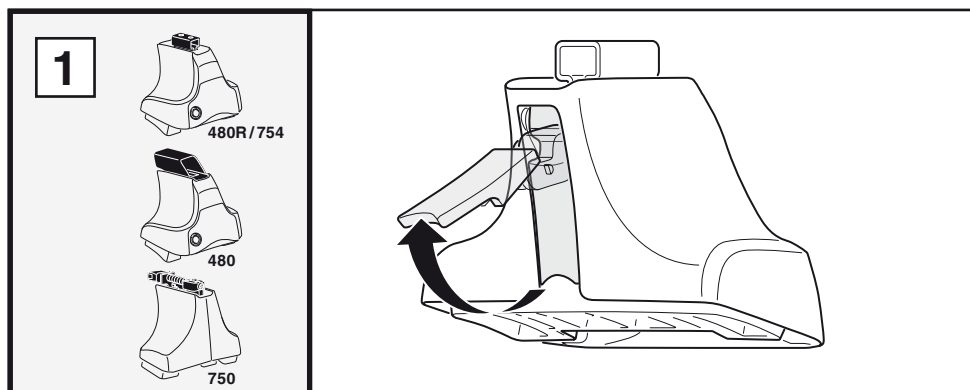

3



1



2





HYUNDAI Genesis, 4-dr Sedan, 08-

X

41

1



2



HYUNDAI Genesis, 4-dr Sedan, 08-

Y

41




480R




480

1



2



HYUNDAI Genesis, 4-dr Sedan, 08-


X inch

X mm


41 3/4"

1061 mm

1



2



HYUNDAI Genesis, 4-dr Sedan, 08-

Y inch














Y mm

41 3/4"


1061 mm

4




HYUNDAI Genesis, 4-dr Sedan, 08–

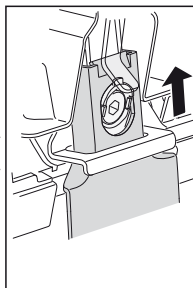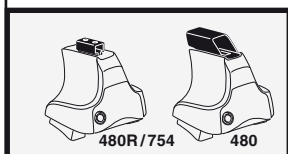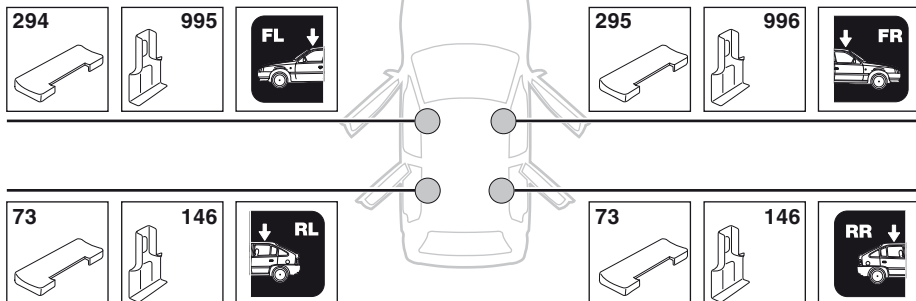

5

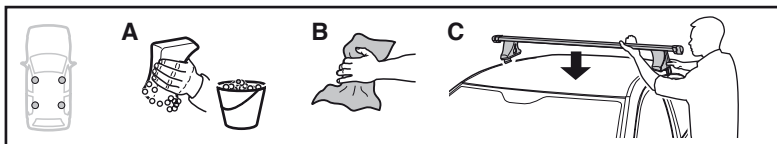

	X mm	Y mm	X inch	Y inch
HYUNDAI Genesis, 4-dr Sedan, 08–	200 mm	710 mm	7 ⁷ / ₈ "	28 "

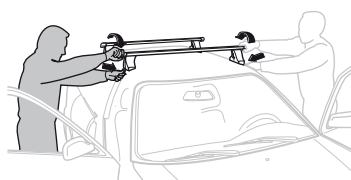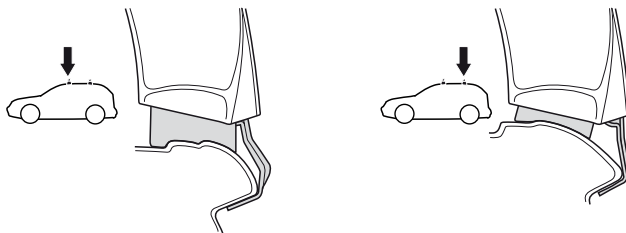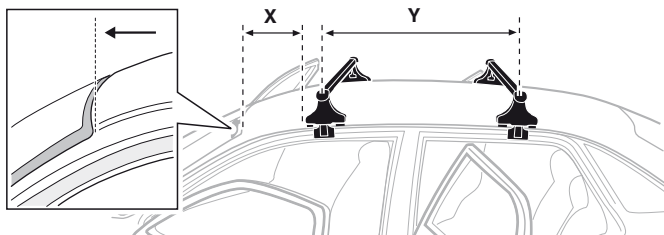

GB/US Tighten alternately

D Die Schrauben abwechselnd anziehen

F Serrer alternativement chaque côté

NL Afwisselend aan de linker- en de rechterkant aandraaien

I Alternare il serraggio delle viti

E Serrare alternativamente

PT Aperte alternadamente

S Dra åt växelvis

FIN Kierrä vuorotellen

EST Pinguldage vaheldumisi

LAT Pievelciet pamišus

LIT Užsukinėkite pakaitomis

PL Śruby dokręcaj naprzemiennie

RU Затягивайте попеременно

CZ Pokręťte bagážníka dokręcaj dokręcaj naprzemiennie.

SK Doťahujte striedavo

SLO Privijajte izmenično.

HR Naizmjenično zategnite

HU Egymástól függetlenül szorítandó

GR Σφίγγετε εναλλάξ

TR Dönüşümlü sıkın


中文 交替拧紧

한국어 번갈아 가며 조이십시오.

日本語 交互に締め付けてください。

ไทย ชันในแบบสลับ



6






480R/754








480

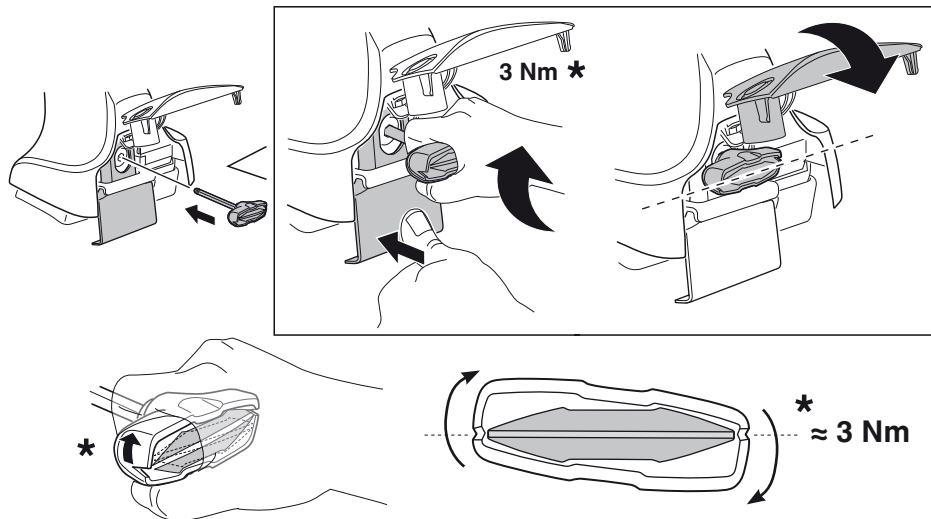

750

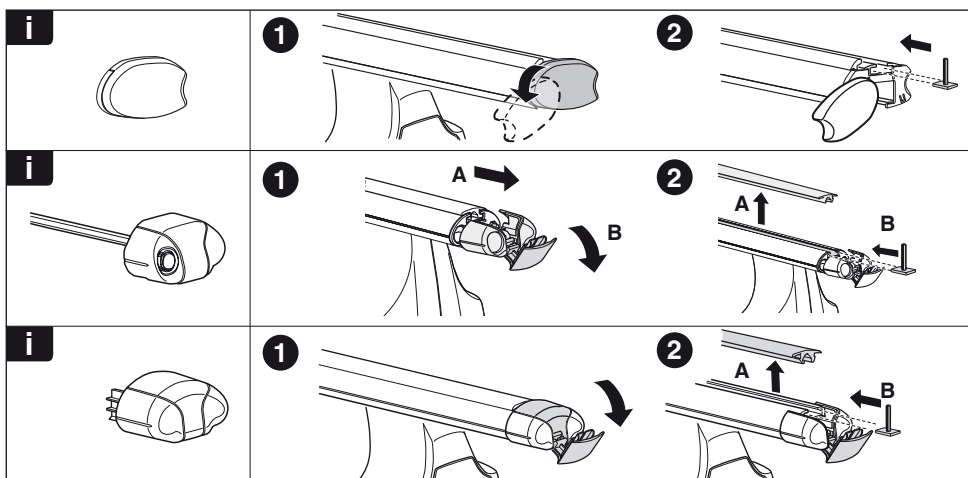

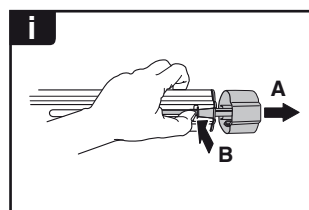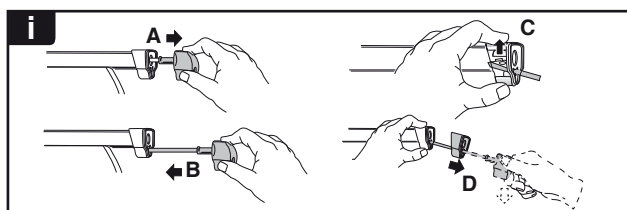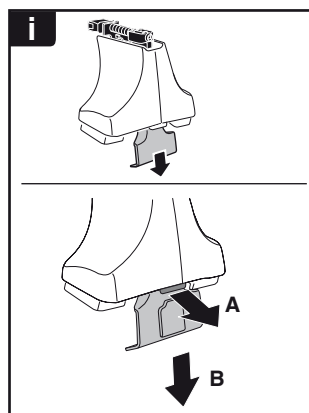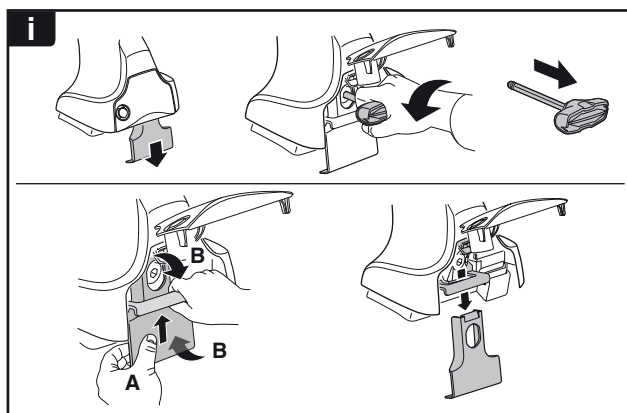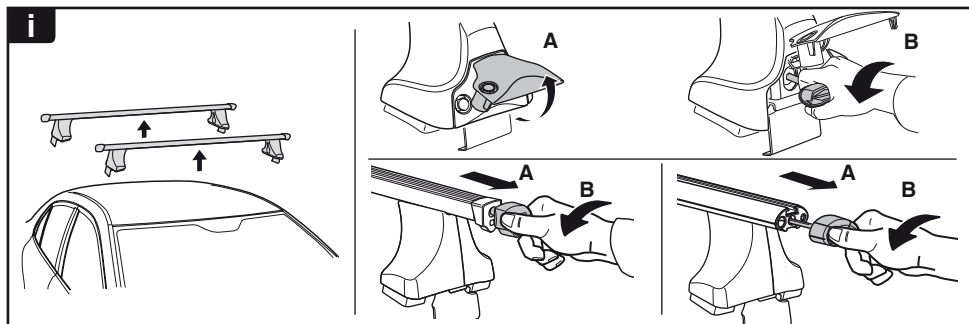

THULE®
SWEDEN

**ONE
KEY
SYSTEM**

544 (x4)

596 (x6)

588 (x8)

NA 510 (x10)

EUR 452 (x12)

ASIA